

Diesel Generator Set B5.9 Series

100-125 kVA, 80-100 kW Prime



Latest Technology and Unmatched Performance

- The Cummins® B5.9 series rugged engine and world class Stamford alternator powered diesel generator set
- Proven technology with mechanical fuel system
- Exhaust after-treatment, in-cylinder solution to meet latest Emission norms
- Smart aesthetic and superior finish
- Compact in size with optimum power to weight ratio

Environment Friendly Power

- Class defining technology engine is designed to meet stringent exhaust emission tests as per revised MoEF norms, thus offering environment friendly power
- The Cummins® diesel generator sets are available with the lowest noise levels in its range

Lowest Operating Cost and Comprehensive Warranty

- Highly reliable and durable product
- All elements are designed to work together to maximize efficiency even at part loads, offering the advantage of lowest operating costs
- 250 Hours/ 1 year service interval
- Industry acknowledged best-in-class comprehensive warranty on the entire package including rubber components

Single Source Power Assurance

- All the major components – the engine, alternator, control system and canopy are designed, manufactured and tested by Cummins India
- Best and Largest customer support network in India, capable of providing round-the-clock service and spares support
- All these things put together, Cummins® offers you SINGLE SOURCE POWER ASSURANCE

Engine

- Cummins® B5.9 series, 6 cylinder, In-line 4 stroke, radiator Cooled Engine
- Well designed air handling system with
 - Dry type, heavy duty, replaceable paper element air cleaner with restriction indicator
 - Air to air aftercooling
 - Optimised turbocharger for increased altitude capabilities
- Optimised fuel consumption with
 - Inline fuel pump with mechanical governing
 - Spin on dual fuel filter with water separator
- Standard integral set-mounted radiator system, designed and tested for 50°C ambient temperature
- Full flow spin on lube oil filter
- First fill of lube oil and coolant
- Electrical starter motor with soft start engagement feature
- Battery charging alternator
- 1 x 12 V DC battery



Alternator

- Stamford S3L1D alternator frames from Cummins Generator Technologies
- Brushless type, Screen protected, Revolving field, Self excited alternator conforming to IS/IEC 60034-1
- Better motor starting capability
- Best in class efficiency
- Compact design with sealed bearings for longer life and lesser maintenance
- Impregnation on all wound components for better mechanical strength

Control Panel

Control panel is manufactured with 14/16 gauge CRCA sheet and is powder coated for weather-proof and long lasting finish. The control panel consists of the following parts:

- PS0600 Controller
- Aluminum bus bars with suitable capacity with incoming/outgoing terminals
- Indicating lamps for 'Load ON' and 'Set Running'
- Instrument fuses duly wired and ferruled
- MCCB of suitable rating with overload and short circuit protections

PS0600 Features

Cummins PowerStart™ PS0600 control is a microprocessor based generator set monitoring and control system.

AMF Functionality is inbuilt and

This control includes an intuitive operator interface that allows for complete generator set control as well as system metering, fault annunciation, configuration and diagnostics.



- AMF Functionality
- Intuitive operator interface which includes LED backlit 128X64 pixel graphic display with tactile feel soft-switches. Indications – Generator set, Utility Status Lamp.
- Remote Start-Stop
- Engine Metering: Oil pressure, Engine temperature, Starting battery voltage, Engine running hours \
- AC Alternator Metering: L-L Voltage and L-N Voltage, Current (phase and total), kVA (phase and total), Frequency, kWh, Total & per phase (kW & kVA), PF, Utility Voltage and Freq.
- Engine Protection: Low lube oil pressure, High/Low Coolant temperature, Battery Over/Under/Weak Volts, Fail to Crank/Start, Sensor failure, Cranking lockout, Low fuel level
- AC Alternator Protection: Over/Under Voltage, Over/Under Frequency, Loss of AC sensing
- Data Logging: Engine Hours, Control Hours and upto 5 recent fault codes
- Configurable glow plug control
- 12/24 Volt DC operation
- Sleep mode
- Modbus interface (RS485 RTU)
- InPower Compatible (PC based service tool)
- Certifications - meets the requirement of relevant ISO, EN, Mil Std. and CE standards
- Hospital grade silencer with rain cap suitably optimized to meet stringent noise emission standards laid down by MoEF / CPCB
- Maintenance due alarm based on Engine Run Time and due date
- Exercisor scheduler
- 4-20mA analog input compatible for oil pressure sensor and fuel level sensor.

Silencer

- Hospital grade silencer with rain cap suitably optimised to meet stringent noise emission standards laid down by MoEF / CPCB

Mounting Arrangement

- Engine and alternator are mounted on a common MS fabricated base frame with AVM pads.
- Base frame with integral fuel tank is provided with drain plug, air vent, inlet and outlet connection, level indicator and provision for cleaning

Optional

- **Engine:** Coolant heater, Electronic Governing
- **Control Panel:**
 - PC1.1
 - PC3.3
 - Bargraph For PC3.3 Panel with kW, Power factor,
 - Frequency, Current, Voltage
 - Remote HMI

Acoustic Enclosure

- Specially designed to meet stringent MoEF/ CPCB norms of 75 dBA @ 1mtr at 75% load under free field conditions
- The acoustic enclosure is made CRCA sheets in munsel green shade and a structural/ sheet metal base frame painted in black.
- High quality noise absorbant and fire-retardant grade acoustic Insulation material (P.U. Foam) complying to IS 8183
- Two point lifting for easy handling at customer site

- Designed to have optimum serviceability
- Air inlet louvers specially designed to operate at rated load
- Made on special purpose CNC machines for consistency in quality and workmanship
- 11 tank pretreatment process and UV resistant powder coating of all parts to withstand extreme environment
- Use of special hardware for longer life
- Flush styling - no projections
- Fluid drains for lube oil and fuel
- Fuel filling arrangement inside the enclosure

Technical Data

Generator Set Specification

Model	C100D5	C125D5P
Duty	Prime	Prime
Power Rating kVA / kWe	100/80	125/100
No. of Phases	3 Phase	3 Phase
Output Voltage and Frequency (V and Hz)	415 V, 50 Hz	415 V, 50 Hz
Power Factor	0.8 (lagging)	0.8 (lagging)
Current (A)	139	174
RPM	1500	1500

Engine Specification

Make	Cummins®	Cummins®
Model	6BTAA5.9-G13	6BTAA5.9-G13
MoEF Certified Power (hp)	159	159
Required Power for Rated kVA (hp)	129	158
Cooling	Liquid Cooled (EG Compleat 50:50)	Liquid Cooled (EG Compleat 50:50)
Aspiration	Turbocharged, Charge Air Cooled	Turbocharged, Charge Air Cooled
No. of cylinders	6, In-line	6, In-line
Bore (mm) x Stroke (mm)	102 x 120	102 x 120
Compression ratio	16.5:1	16.5:1
Displacement (litre)	5.9	5.9
Fuel	High Speed Diesel	High Speed Diesel
Fuel consumption @75% load with radiator and fan* (litre/hr)	18.32	22.5
Fuel consumption @100% load with radiator and fan* (litre/hr)	24.60	30.25
Performance class of generator set	ISO 8528-5 G2	ISO 8528-5 G2
Starting system	12 V DC Electrical	12 V DC Electrical
Lube oil specification	CI4+ 15W40	CI4+ 15W40
Lube oil sump capacity, High-Low level (litre)	19.9-14.9	19.9-14.9
Total lubrication system capacity (litre)	21.4	21.4
Total coolant capacity (litre)	26	26
Exhaust pipe size (inch)	4	4
Total wet weight (Engine+Radiator)** (kg)	523	523
Length x Width x Height (Engine) (mm)	1066 x 725 x 1033	1066 x 725 x 1033
Mean Piston speed (m/s)	6	6
Combustion air intake @100% load (±5%) (cfm)	311	311
Exhaust Temperature (°C)	553	553

Alternator Specification

Make	Stamford (CGT)	Stamford (CGT)
Alternator Frame	S3L1D-C41	S3L1D-D41
Enclosure	IP 23	IP 23
Voltage regulation (Max.)	±0.5%	±0.5%
Class of Insulation	H Class	H Class
Winding Pitch	2/3	2/3
Stator Winding	Double layer concentric	Double layer concentric
Rotor	Dynamically Balanced	Dynamically Balanced
Waveform distortion/ Total Harmonic Distortion	No load < 2%, Non distorting balanced linear load < 5 %	No load < 2%, Non distorting balanced linear load < 5 %
Maximum Unbalanced Load across phases#	less than or equal to 25%	less than or equal to 25%
Telephonic Harmonic factor	< 2%	< 2%

* Fuel consumption data is based on diesel having specific gravity of 0.85 and conforming to IS:1460. Fuel consumption tolerance is +5%

With the condition that none of the phases exceeds its rated current

Rating Definitions

Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528.


Conformance Standards

- IS/IEC 60034-1
- IS 8528
- ISO 9001
- ISO 1460
- ISO 3046
- IS 13018

Typical Enclosed Genset Dimensions

Genset Model	Rating (kVA)	Length (mm)	Width (mm)	Height (mm)	Wet Weight ^{##} (kg)	Standard Fuel tank Capacity (litre)
C100D5P	100	4000	1150	1850	2174	290
C125D5P	125	4000	1150	1850	2180	290

^{##} Approximate Weight

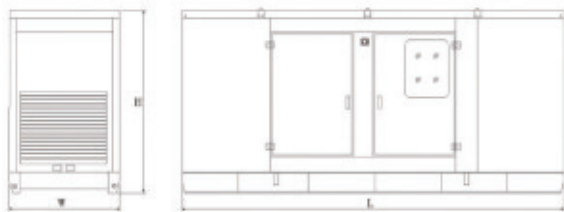

Authorised Representative

Powerica Sales Office

- | | |
|---|-------------------------------|
| Toll Free Number: +91 1800 2666036 | Kolhapur: +91 9011124488 |
| Head Office: +91 22 66562525 +91 22 4315 2525 | Madurai: +91 4524200081 |
| Ahmedabad: +91 7926468550 | Nagpur: +91 7126631089 |
| Aurangabad: +91 2406601921 | Pune: +91 20 67488299 |
| Bengaluru: +91 22 22257338 | Mumbai: +91 9821013074 |
| Chennai: +91 44 42422222 | Vijayawada: +91 8790100552 |
| Coimbatore: +91 4222205300 | Visakhapatnam: +91 8790100556 |
| Goa: +91 8322438587 | Belapur: +91 9833314448 |
| Kochi: +91 4842353595 | Mysore: +91 9686447100 |
| Hyderabad: +91 9849796100 | Rajahmundry: +91 8190100858 |



Visit our facebook page at :
Cummins Power Generation India



“Our energy working for you.”

Cummins is registered trademarks of Cummins Inc. Specifications are subject to change without notice. PSBU/008/6B5.9/HD/MP/Revision-4 (10-2021)



Cummins India Limited Power Systems Business

Cummins India Office Campus
Tower-A, 8th Floor, S. No. 21
Balewadi, Pune - 411 045 (India)
Email : cpgindia@cummins.com
www.cummins.com



Powerica Limited

9th Floor, Bakhtawar, Nariman Point,
Mumbai – 400 021
Email : atp@powericaltd.com
www.powericaaltd.com